



AIR DIAPHRAGM PUMP

Product Code : W00414


The Diaphragm Pump System is a pneumatic driven diaphragm pump and tank set. It is suitable for circulating and transferring various marine products. The unit is suitable for introducing cleaning products from the smallest heat exchanger to the largest diesel jacket system, propulsion boiler, or tank. The system may also be used for circulating cleaning solutions through evaporators and small heat exchangers or for stripping tanks and bilges. The 3-way suction valve design allows for system circulation without the risk of tank overflow or it can be externally piped to provide system return to the tank.

Chemical Cleaning:

- SCALE OFF S descaling compound
- DESCALER liquid acid descaler
- TANK WASH S tank cleaner
- OIL & GREASE REMOVER heavy-duty emulsifier
- CARBON REMOVER solvent cleaner
- EUROCLEAN general-purpose cleaner
- RUST REMOVER rust stain remover
- ACC air cooler cleaner
- OIL REMOVER S oil and grease remover
- EUROBRAKE quick separating degreaser
- ARR SAFETY LIQUID heavy-duty cleaner
- ARR LIQUID liquid alkaline cleaner

Specifications

- Air Pressure Required: 1.3-7 bar (20 psi-100 psi)
- Air Consumption: 0.1-85 M³/hr (0.1-50 Ft³/min)
- Max Flow Rate: 7.9 M³/hr (35 GPM)
- Max Discharge Press: 6.9 bar (100 psi)
- Max Suct Lift: 6.1 mtr (20 ft)
- Tank Capacity: 100 ltr (26 gal)

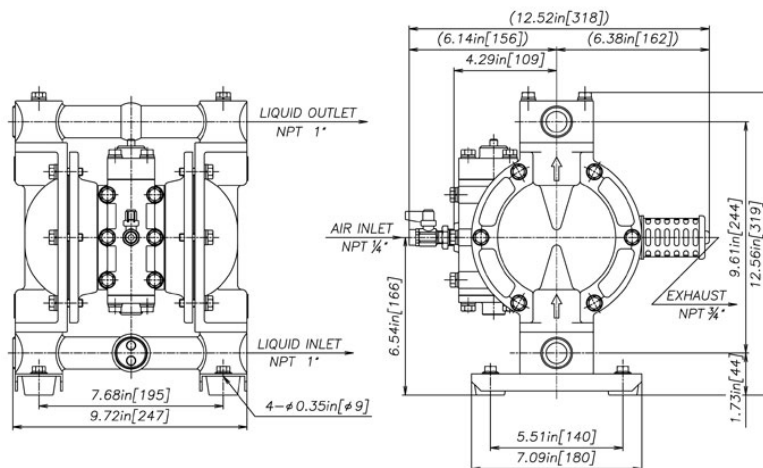

LIMITATION OF LIABILITY

EUROCHEM INTERNATIONAL standard terms and conditions of sale, available on request, apply and contain limitations on any liability that may be incurred by EUROCHEM INTERNATIONAL arising in any way from the sale and use of products supplied by EUROCHEM INTERNATIONAL